



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.
NTT Business W 907G

SPECfp®2006 = 17.4

SPECfp_base2006 = 16.8

CPU2006 license: 9013


Test sponsor: NTT System S. A.

Tested by: NTT System S. A.

Test date: Jul-2009

Hardware Availability: Jul-2009

Software Availability: Nov-2008

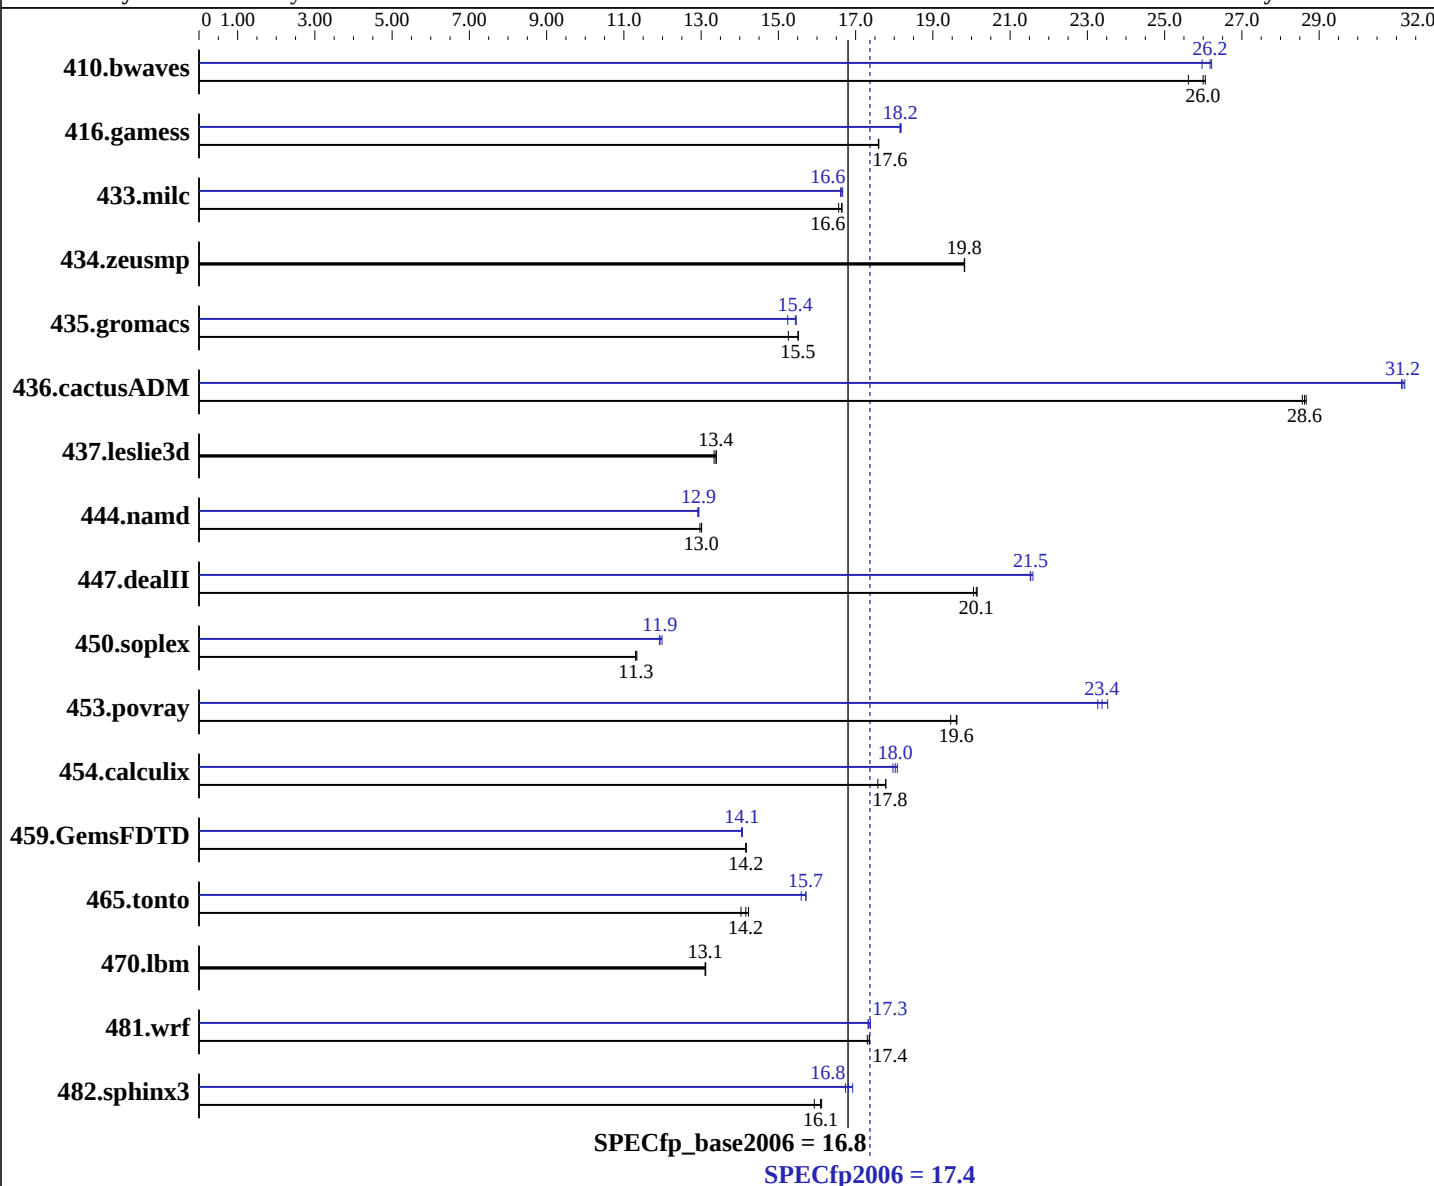

Hardware

CPU Name: Intel Celeron E3200
CPU Characteristics:
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per chip

Continued on next page

Software

Operating System: SuSe Linux SLES10 SP2, Kernel 2.6.16.60-0.21-smp
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux
Build 20080930 Package ID: l_cproc_p_11.0.066,
l_cprof_p_11.0.066
Auto Parallel: Yes
File System: ReiserFS
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

NTT Business W 907G

SPECfp2006 = 17.4

SPECfp_base2006 = 16.8

CPU2006 license: 9013

Test sponsor: NTT System S. A.

Tested by: NTT System S. A.

Test date: Jul-2009

Hardware Availability: Jul-2009

Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 4 GB (2x2GB) DDR2 800Mhz
Disk Subsystem: 250 GB SATA, 7200RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	531	25.6	522	26.1	<u>523</u>	<u>26.0</u>	523	26.0	518	26.2	<u>519</u>	<u>26.2</u>
416.gamess	1113	17.6	1113	17.6	<u>1113</u>	<u>17.6</u>	<u>1078</u>	<u>18.2</u>	1077	18.2	1079	18.1
433.milc	554	16.6	<u>552</u>	<u>16.6</u>	551	16.6	<u>552</u>	<u>16.6</u>	551	16.7	553	16.6
434.zeusmp	<u>459</u>	<u>19.8</u>	459	19.8	459	19.8	<u>459</u>	<u>19.8</u>	459	19.8	459	19.8
435.gromacs	<u>460</u>	<u>15.5</u>	468	15.3	460	15.5	468	15.2	<u>462</u>	<u>15.4</u>	462	15.5
436.cactusADM	417	28.7	<u>418</u>	<u>28.6</u>	418	28.6	383	31.2	<u>383</u>	<u>31.2</u>	384	31.1
437.leslie3d	<u>702</u>	<u>13.4</u>	705	13.3	702	13.4	<u>702</u>	<u>13.4</u>	705	13.3	702	13.4
444.namd	<u>616</u>	<u>13.0</u>	616	13.0	618	13.0	620	12.9	621	12.9	<u>620</u>	<u>12.9</u>
447.dealII	571	20.1	568	20.1	<u>568</u>	<u>20.1</u>	532	21.5	<u>531</u>	<u>21.5</u>	530	21.6
450.soplex	<u>737</u>	<u>11.3</u>	738	11.3	736	11.3	696	12.0	<u>699</u>	<u>11.9</u>	700	11.9
453.povray	271	19.6	<u>271</u>	<u>19.6</u>	273	19.5	226	23.5	229	23.3	<u>228</u>	<u>23.4</u>
454.calculix	<u>464</u>	<u>17.8</u>	464	17.8	469	17.6	456	18.1	<u>458</u>	<u>18.0</u>	459	18.0
459.GemsFDTD	749	14.2	750	14.2	<u>749</u>	<u>14.2</u>	755	14.0	<u>755</u>	<u>14.1</u>	754	14.1
465.tonto	701	14.0	<u>695</u>	<u>14.2</u>	692	14.2	631	15.6	<u>626</u>	<u>15.7</u>	626	15.7
470.lbm	<u>1048</u>	<u>13.1</u>	1047	13.1	1049	13.1	<u>1048</u>	<u>13.1</u>	1047	13.1	1049	13.1
481.wrf	<u>644</u>	<u>17.4</u>	646	17.3	644	17.4	<u>645</u>	<u>17.3</u>	645	17.3	643	17.4
482.sphinx3	1223	15.9	1209	16.1	<u>1211</u>	<u>16.1</u>	1164	16.7	<u>1159</u>	<u>16.8</u>	1152	16.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

NTT Business W 907G

SPECfp2006 = 17.4

SPECfp_base2006 = 16.8

CPU2006 license: 9013

Test sponsor: NTT System S. A.

Tested by: NTT System S. A.

Test date: Jul-2009

Hardware Availability: Jul-2009

Software Availability: Nov-2008

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

NTT Business W 907G

SPECfp2006 = 17.4

SPECfp_base2006 = 16.8

CPU2006 license: 9013

Test sponsor: NTT System S. A.

Tested by: NTT System S. A.

Test date: Jul-2009

Hardware Availability: Jul-2009

Software Availability: Nov-2008

Peak Compiler Invocation (Continued)

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):

`icpc`

450.soplex: `icpc -m32`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -fno-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xSSSE3 -ipo -O3 -no-prec-div -static -unroll2`

C++ benchmarks:

444.namd: `-prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

NTT Business W 907G

SPECfp2006 = 17.4

SPECfp_base2006 = 16.8

CPU2006 license: 9013

Test sponsor: NTT System S. A.

Tested by: NTT System S. A.

Test date: Jul-2009

Hardware Availability: Jul-2009

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-
-opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -O0 -ansi-alias
-scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -O0 -opt-prefetch
-parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: -xSSSE3 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090827.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090827.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

NTT Business W 907G

SPECfp2006 = 17.4

SPECfp_base2006 = 16.8

CPU2006 license: 9013

Test sponsor: NTT System S. A.

Tested by: NTT System S. A.

Test date: Jul-2009

Hardware Availability: Jul-2009

Software Availability: Nov-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:13:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 August 2009.