



SPEC® OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Bull

(Test Sponsor: Technische Universitaet Dresden)

bullx DLC B720 (Intel Xeon E5-2680 v4 @ 2.40 GHz)

SPECompG_peak2012 = 9.09

SPECompG_base2012 = 8.76

OMP2012 license:37A


Test sponsor: Technische Universitaet Dresden

Tested by: Technische Universitaet Dresden

Test date: Sep-2017

Hardware Availability: Jan-2016

Software Availability: May-2017

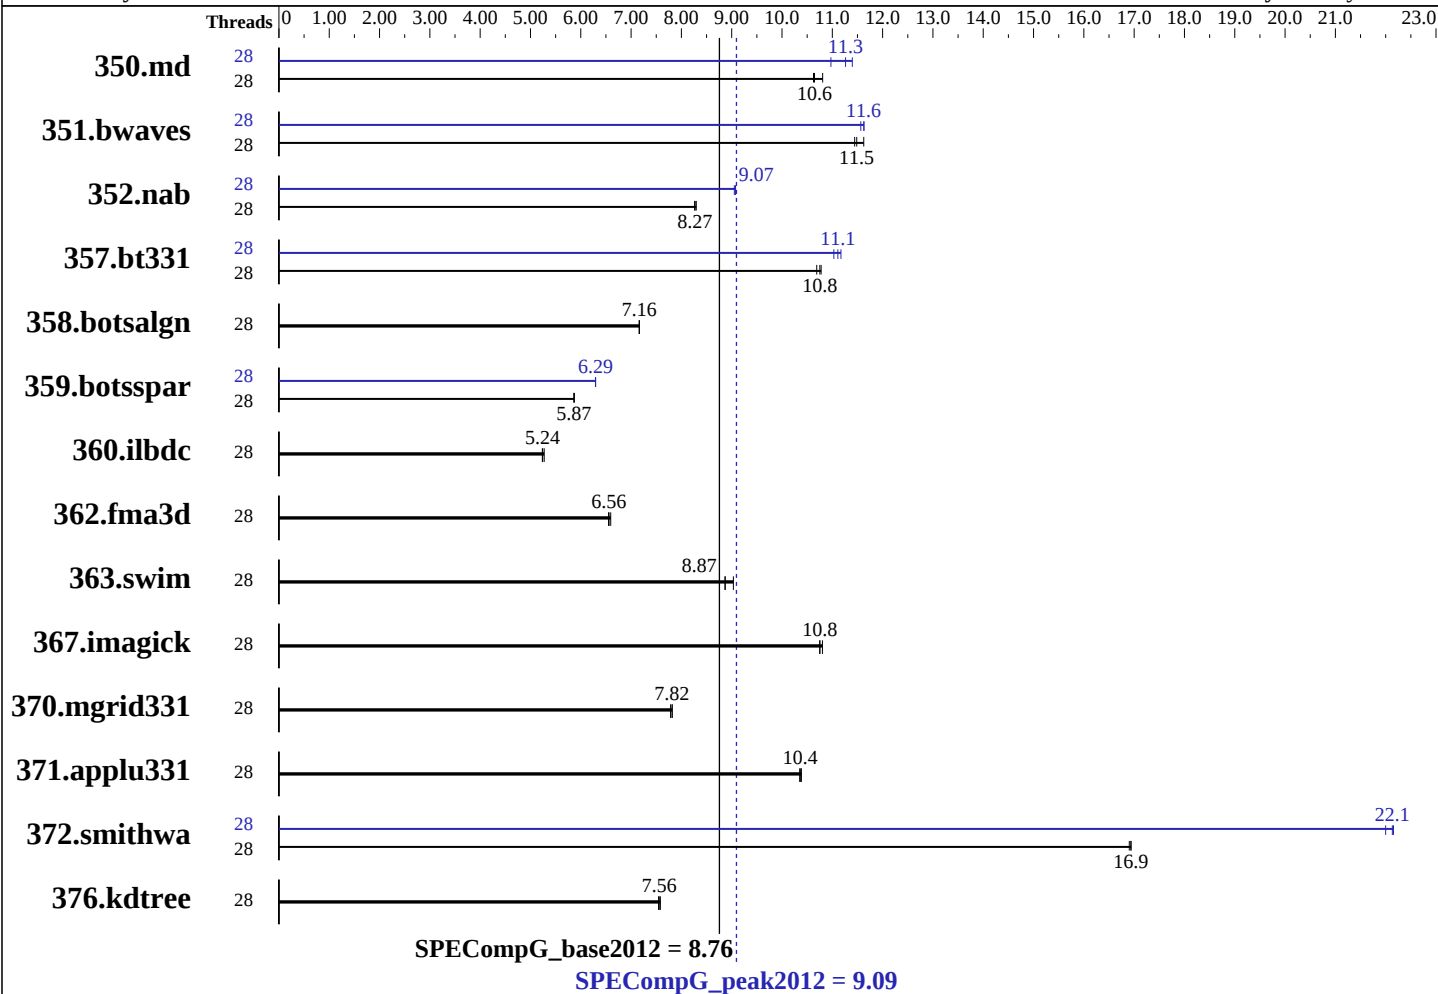

Hardware

CPU Name: Intel Xeon E5-2680 v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.3 GHz
CPU MHz: 2400
CPU MHz Maximum: 3300
FPU: Integrated
CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (8 x 8 GB 2Rx8 PC4-2400T-R)
Disk Subsystem: 256 GB Micron SSD 1100
Other Hardware: None
Base Threads Run: 28
Minimum Peak Threads: 28

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.9 (Santiago)
Kernel 2.6.32-696.3.1.el6.Bull.118.x86_64
Compiler: C/C++/Fortran: Version 17.0.4.196 of Intel Composer Build 20170411
Auto Parallel: No
File System: ext3
System State: Default
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: None



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Bull

(Test Sponsor: Technische Universitaet Dresden)

bullx DLC B720 (Intel Xeon E5-2680 v4 @ 2.40 GHz)

SPECompG_peak2012 = 9.09

SPECompG_base2012 = 8.76

OMP2012 license:37A

Test sponsor: Technische Universitaet Dresden

Tested by: Technische Universitaet Dresden

Test date: Sep-2017

Hardware Availability: Jan-2016

Software Availability: May-2017

Maximum Peak Threads: 28

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	28	436	10.6	435	10.6	428	10.8	28	406	11.4	422	11.0	411	11.3
351.bwaves	28	394	11.5	396	11.4	390	11.6	28	390	11.6	390	11.6	392	11.6
352.nab	28	471	8.26	470	8.27	469	8.30	28	429	9.08	430	9.05	429	9.07
357.bt331	28	440	10.8	443	10.7	441	10.8	28	424	11.2	427	11.1	430	11.0
358.botsalgn	28	607	7.16	607	7.16	607	7.16	28	607	7.16	607	7.16	607	7.16
359.botsspar	28	894	5.87	895	5.87	895	5.87	28	834	6.29	834	6.30	834	6.29
360.ilbdc	28	675	5.27	679	5.24	680	5.24	28	675	5.27	679	5.24	680	5.24
362.fma3d	28	576	6.60	580	6.55	579	6.56	28	576	6.60	580	6.55	579	6.56
363.swim	28	511	8.87	511	8.87	501	9.03	28	511	8.87	511	8.87	501	9.03
367.imagick	28	654	10.8	651	10.8	654	10.7	28	654	10.8	651	10.8	654	10.7
370.mgrid331	28	565	7.82	568	7.78	566	7.82	28	565	7.82	568	7.78	566	7.82
371.applu331	28	585	10.4	583	10.4	585	10.4	28	585	10.4	583	10.4	585	10.4
372.smithwa	28	317	16.9	317	16.9	316	16.9	28	242	22.2	244	22.0	242	22.1
376.kdtree	28	593	7.58	595	7.56	596	7.54	28	593	7.58	595	7.56	596	7.54

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Sysinfo program /tmp/spec/1.1/Docs/sysinfo
Revision 563 of 2016-06-10 (097295389cf6073d8c3b03fa376740a5)
running on taurusi4264 Tue Sep 5 11:27:41 2017

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2680 v4 @ 2.40GHz
2 "physical id"s (chips)
28 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 14
siblings : 14
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 35840 KB

From /proc/meminfo
MemTotal: 65588120 kB

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Bull

(Test Sponsor: Technische Universitaet Dresden)

bullx DLC B720 (Intel Xeon E5-2680 v4 @ 2.40 GHz)

SPECompG_peak2012 = 9.09

SPECompG_base2012 = 8.76

OMP2012 license:37A

Test sponsor: Technische Universitaet Dresden

Tested by: Technische Universitaet Dresden

Test date: Sep-2017

Hardware Availability: Jan-2016

Software Availability: May-2017

Platform Notes (Continued)

HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.9 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.9 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.9 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux taurusi4264 2.6.32-696.3.1.el6.Bull.118.x86_64 #1 SMP Thu Jun 15
17:05:40 CEST 2017 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 1 18:29

SPEC is set to: /tmp/spec/1.1
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda4 ext4 99G 1.7G 92G 2% /tmp

Cannot run dmidecode; consider saying 'chmod +s /usr/sbin/dmidecode'

(End of data from sysinfo program)

General Notes

System settings:
HyperThreading: disabled
Environment variables:
ENV_KMP_AFFINITY=compact,0
ENV_KMP_LIBRARY=turnaround
ENV_KMP_BLOCKTIME=infinite
ENV_KMP_STACKSIZE=190M
ENV_OMP_DYNAMIC=FALSE
ENV_OMP_NESTED=FALSE

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Bull

(Test Sponsor: Technische Universitaet Dresden)

bullx DLC B720 (Intel Xeon E5-2680 v4 @ 2.40 GHz)

SPECompG_peak2012 = 9.09

SPECompG_base2012 = 8.76

OMP2012 license:37A

Test sponsor: Technische Universitaet Dresden

Tested by: Technische Universitaet Dresden

Test date: Sep-2017

Hardware Availability: Jan-2016

Software Availability: May-2017

Base Portability Flags

350.md: -FR
357.bt331: -mcmodel=medium
363.swim: -mcmodel=medium
367.imagick: -std=c99

Base Optimization Flags

C benchmarks:
-O2 -openmp -ipo -xCORE-AVX2 -ansi-alias
C++ benchmarks:
-O2 -openmp -ipo -xCORE-AVX2 -ansi-alias
Fortran benchmarks:
-O2 -openmp -ipo -xCORE-AVX2 -align array64byte

Peak Compiler Invocation

C benchmarks:
icc
C++ benchmarks:
icpc
Fortran benchmarks:
ifort

Peak Portability Flags

350.md: -FR
357.bt331: -mcmodel=medium
363.swim: -mcmodel=medium
367.imagick: -std=c99

Peak Optimization Flags

C benchmarks:
352.nab: -O3 -openmp -ipo -xCORE-AVX2 -fno-alias
-opt-malloc-options=1 -opt-calloc -fp-model fast=2
-no-prec-div -no-prec-sqrt -ansi-alias

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Bull

(Test Sponsor: Technische Universitaet Dresden)

bullx DLC B720 (Intel Xeon E5-2680 v4 @ 2.40 GHz)

SPECompG_peak2012 = 9.09

SPECompG_base2012 = 8.76

OMP2012 license:37A

Test sponsor: Technische Universitaet Dresden

Tested by: Technische Universitaet Dresden

Test date: Sep-2017

Hardware Availability: Jan-2016

Software Availability: May-2017

Peak Optimization Flags (Continued)

358.botsalgn: basepeak = yes

359.botsspar: -O3 -openmp -ipo -xCORE-AVX2 -fno-alias -ansi-alias

367.imagick: basepeak = yes

372.smithwa: -O2 -openmp -ipo -xCORE-AVX2 -fno-alias
-opt-streaming-stores always -opt-malloc-options=1
-ansi-alias

C++ benchmarks:

376.kdtree: basepeak = yes

Fortran benchmarks:

350.md: -O2 -openmp -ipo -xCORE-AVX2 -fno-alias
-opt-malloc-options=1 -fp-model fast=2 -no-prec-div
-no-prec-sqrt -align array64byte

351.bwaves: -O3 -openmp -ipo -xCORE-AVX2 -fno-alias -fp-model fast=2
-no-prec-div -no-prec-sqrt -align array64byte

357.bt331: Same as 351.bwaves

360.ilbdc: basepeak = yes

362.fma3d: basepeak = yes

363.swim: basepeak = yes

370.mgrid331: basepeak = yes

371.applu331: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/icc2018-openmp.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/omp2012/flags/icc2018-openmp.xml>



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Bull

(Test Sponsor: Technische Universitaet Dresden)

bullx DLC B720 (Intel Xeon E5-2680 v4 @ 2.40 GHz)

SPECompG_peak2012 = 9.09

SPECompG_base2012 = 8.76

OMP2012 license:37A

Test sponsor: Technische Universitaet Dresden

Tested by: Technische Universitaet Dresden

Test date: Sep-2017

Hardware Availability: Jan-2016

Software Availability: May-2017

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.1.
Report generated on Wed Dec 20 13:45:30 2017 by SPEC OMP2012 PS/PDF formatter v541.
Originally published on 20 December 2017.