



SPEC® OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Uniwide Technologies

(Test Sponsor: Telecommunications Technology Association)

SPECompG_peak2012 = Not Run

RB128 (Intel Xeon E5-2699 v4, 2.20 GHz)

SPECompG_base2012 = 11.8

OMP2012 license:068A


Test sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test date: Dec-2019

Hardware Availability: May-2017

Software Availability: Dec-2018

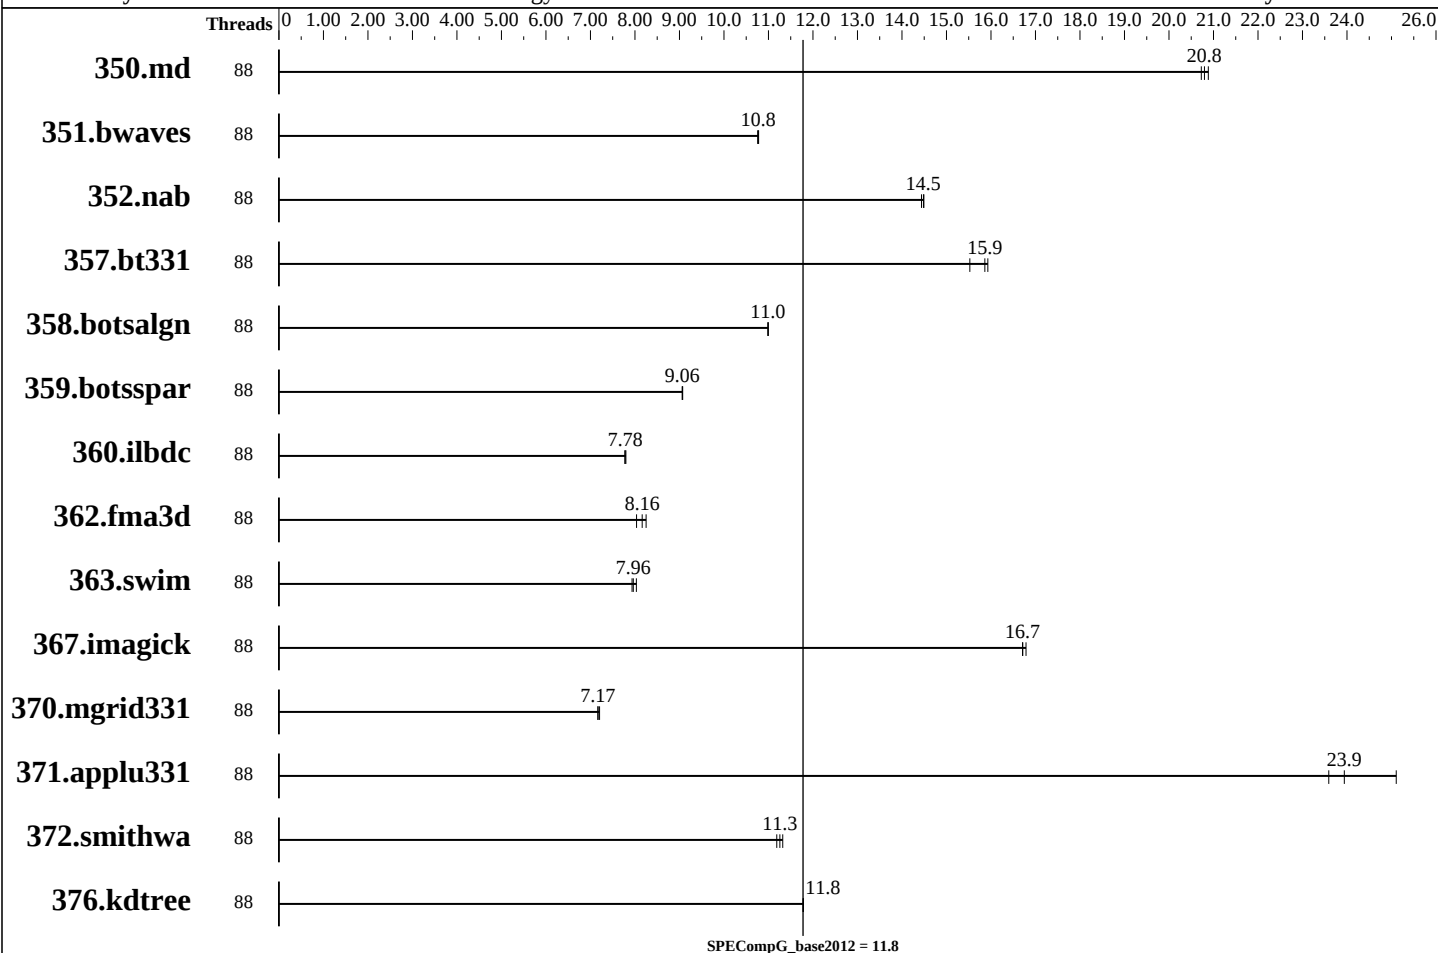

Hardware

CPU Name: Intel Xeon E5-2699 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz Hyper-threading On.
 CPU MHz: 2200
 CPU MHz Maximum: 3600
 FPU: Integrated
 CPU(s) enabled: 44 cores, 2 chips, 22 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 Chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 55 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 2 x 300GB SEAGATE ST300MM0048 SAS RAID0
 Other Hardware: None
 Base Threads Run: 88

Continued on next page

Software

Operating System: CentOS Linux release 7.7.1908 (Core)
 Compiler: C/C++/Fortran: Version 18.0.1.163 of Intel Composer XE for Linux Build 20171018
 Auto Parallel: No
 File System: xfs
 System State: Multi-user, run level 3
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other Software: None



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Uniwide Technologies

(Test Sponsor: Telecommunications Technology Association)

SPECompG_peak2012 = Not Run

RB128 (Intel Xeon E5-2699 v4, 2.20 GHz)

SPECompG_base2012 = 11.8

OMP2012 license:068A

Test sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test date: Dec-2019

Hardware Availability: May-2017

Software Availability: Dec-2018

Minimum Peak Threads: --

Maximum Peak Threads: --

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	88	<u>223</u>	<u>20.8</u>	222	20.9	223	20.7							
351.bwaves	88	421	10.8	420	10.8	<u>421</u>	<u>10.8</u>							
352.nab	88	269	14.4	268	14.5	<u>269</u>	<u>14.5</u>							
357.bt331	88	<u>299</u>	<u>15.9</u>	298	15.9	305	15.5							
358.botsalgn	88	<u>396</u>	<u>11.0</u>	396	11.0	396	11.0							
359.botsspar	88	<u>579</u>	<u>9.06</u>	579	9.06	579	9.07							
360.ilbdc	88	457	7.80	458	7.77	<u>458</u>	<u>7.78</u>							
362.fma3d	88	<u>466</u>	<u>8.16</u>	473	8.04	461	8.25							
363.swim	88	564	8.03	571	7.93	<u>569</u>	<u>7.96</u>							
367.imagick	88	<u>421</u>	<u>16.7</u>	421	16.7	419	16.8							
370.mgrid331	88	<u>616</u>	<u>7.17</u>	613	7.20	617	7.17							
371.applu331	88	241	25.1	<u>253</u>	<u>23.9</u>	257	23.6							
372.smithwa	88	473	11.3	479	11.2	<u>476</u>	<u>11.3</u>							
376.kdtree	88	382	11.8	<u>382</u>	<u>11.8</u>	382	11.8							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Sysinfo program /usr/omp2012/Docs/sysinfo

\$Rev: 395 \$ \$Date:: 2012-07-25 \$ \$ 8f8c0fe9e19c658963a1e67685e50647
running on uniwide-rb128 Mon Dec 2 22:41:59 2019

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz

2 "physical id"s (chips)

88 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 22

siblings : 44

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

cache size : 56320 KB

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Uniwide Technologies

(Test Sponsor: Telecommunications Technology Association)

SPECompG_peak2012 = Not Run

RB128 (Intel Xeon E5-2699 v4, 2.20 GHz)

SPECompG_base2012 = 11.8

OMP2012 license:068A

Test sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test date: Dec-2019

Hardware Availability: May-2017

Software Availability: Dec-2018

Platform Notes (Continued)

From /proc/meminfo

MemTotal: 528087944 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

centos-release: CentOS Linux release 7.7.1908 (Core)

centos-release-upstream: Derived from Red Hat Enterprise Linux 7.7 (Source)

os-release:

NAME="CentOS Linux"

VERSION="7 (Core)"

ID="centos"

ID_LIKE="rhel fedora"

VERSION_ID="7"

PRETTY_NAME="CentOS Linux 7 (Core)"

ANSI_COLOR="0;31"

CPE_NAME="cpe:/o:centos:centos:7"

redhat-release: CentOS Linux release 7.7.1908 (Core)

system-release: CentOS Linux release 7.7.1908 (Core)

system-release-cpe: cpe:/o:centos:centos:7

uname -a:

Linux uniwide-rb128 3.10.0-1062.4.1.el7.x86_64 #1 SMP Fri Oct 18 17:15:30 UTC 2019 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 2 13:46

SPEC is set to: /usr/omp2012

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/centos-root	xfs	50G	7.2G	43G	15%	/

Additional information from dmidecode:

BIOS American Megatrends Inc. 3407 01/11/2017

Memory:

16x 32 GB

12x Hynix Semiconductor HMA84GR7AFR4N-UH 32 GB 2133 MT/s 2 rank

4x Hynix Semiconductor HMA84GR7MFR4N-UH 32 GB 2133 MT/s 2 rank

8x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

System settings notes:

Intel Turbo Boost Technology (Turbo) : Enabled

Hyper-threading : Disabled

General OMP Library Settings

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Uniwide Technologies

(Test Sponsor: Telecommunications Technology Association)

SPECompG_peak2012 = Not Run

RB128 (Intel Xeon E5-2699 v4, 2.20 GHz)

SPECompG_base2012 = 11.8

OMP2012 license:068A

Test sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test date: Dec-2019

Hardware Availability: May-2017

Software Availability: Dec-2018

General Notes (Continued)

KMP_AFFINITY=compact,0
KMP_LIBRARY=turnaround
KMP_STACKSIZE=512M
KMP_BLOCKTIME=infinite
OMP_DYNAMIC=FALSE
OMP_NESTED=FALSE
OMP_SCHEDULE=static

=====
Environment Variables Settings
ulimit -s unlimited

=====
Spectre and Meltdown

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

350.md: -FR
357.bt331: -mmodel=medium
363.swim: -mmodel=medium
367.imagick: -std=c99

Base Optimization Flags

C benchmarks:
-ansi-alias -qopenmp -ipo -O3 -no-prec-div -no-prec-sqrt
-fp-model fast=2 -xHost

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Uniwide Technologies

(Test Sponsor: Telecommunications Technology Association)

SPECompG_peak2012 = Not Run

RB128 (Intel Xeon E5-2699 v4, 2.20 GHz)

SPECompG_base2012 = 11.8

OMP2012 license:068A

Test sponsor: Telecommunications Technology Association

Tested by: Telecommunications Technology Association

Test date: Dec-2019

Hardware Availability: May-2017

Software Availability: Dec-2018

Base Optimization Flags (Continued)

C++ benchmarks:

-ansi-alias -qopenmp -ipo -O3 -no-prec-div -no-prec-sqrt
-fp-model fast=2 -xHost

Fortran benchmarks:

-qopenmp -ipo -O3 -no-prec-div -no-prec-sqrt -fp-model fast=2
-xHost

The flags file that was used to format this result can be browsed at

http://www.spec.org/omp2012/flags/icc_linux_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/omp2012/flags/icc_linux_flags.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.0.

Report generated on Wed Dec 18 14:50:38 2019 by SPEC OMP2012 PS/PDF formatter v541.

Originally published on 18 December 2019.