



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Huawei XH621 v2

SPECint®2006 = 27.9

SPECint_base2006 = 26.4

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: May-2014

Hardware Availability: Jan-2012

Software Availability: Nov-2013

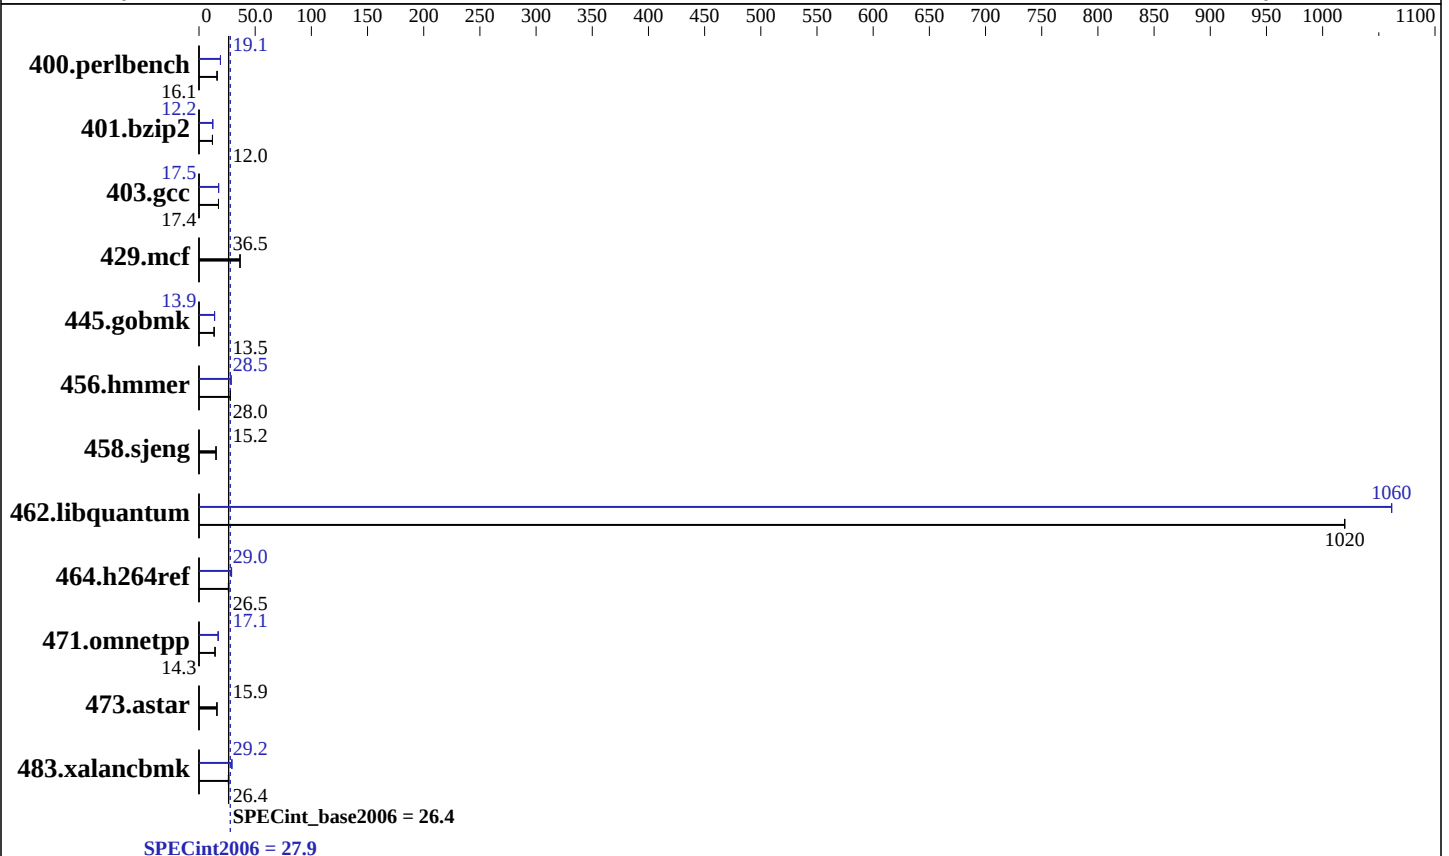

Hardware

CPU Name: Intel Xeon E5-2603
CPU Characteristics:
CPU MHz: 1800
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-10600R-09, ECC)
Disk Subsystem: 1 X 300 GB SAS 7200RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
2.6.32-431.el6.x86_64
Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel: Yes
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Huawei XH621 v2

SPECint2006 = 27.9

SPECint_base2006 = 26.4

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2014
Hardware Availability: Jan-2012
Software Availability: Nov-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	607	16.1	607	16.1	607	16.1	512	19.1	512	19.1	512	19.1
401.bzip2	805	12.0	806	12.0	806	12.0	789	12.2	789	12.2	790	12.2
403.gcc	464	17.3	464	17.4	464	17.4	461	17.5	461	17.4	461	17.5
429.mcf	250	36.5	250	36.5	250	36.5	250	36.5	250	36.5	250	36.5
445.gobmk	778	13.5	779	13.5	778	13.5	757	13.9	756	13.9	757	13.9
456.hmmer	333	28.0	333	28.0	336	27.8	327	28.5	326	28.6	329	28.4
458.sjeng	798	15.2	798	15.2	798	15.2	798	15.2	798	15.2	798	15.2
462.libquantum	20.3	1020	20.3	1020	20.3	1020	19.5	1060	19.5	1060	19.5	1060
464.h264ref	837	26.5	837	26.5	847	26.1	763	29.0	764	29.0	774	28.6
471.omnetpp	438	14.3	437	14.3	437	14.3	365	17.1	366	17.1	367	17.0
473.astar	440	16.0	440	15.9	440	15.9	440	16.0	440	15.9	440	15.9
483.xalancbmk	264	26.1	261	26.4	262	26.4	236	29.2	236	29.2	236	29.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Set Power Efficiency Mode to Performance
Sysinfo program /spec/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on huawei Wed May 14 11:04:42 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2603 0 @ 1.80GHz
2 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 4
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECint2006 =	27.9
Huawei XH621 v2	SPECint_base2006 =	26.4

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2014
Hardware Availability: Jan-2012
Software Availability: Nov-2013

Platform Notes (Continued)

```
From /proc/meminfo
MemTotal:      132103760 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux huawei 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 14 11:01
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1        ext4  193G   82G  102G  45% /
```

```
Additional information from dmidecode:
Memory:
11x Samsung M393B1K70CH0-CH9 8 GB 1333 MHz 2 rank
5x Samsung M393B1K70DH0-CH9 8 GB 1333 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "8"
```

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory
using RHEL 6.1
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECint2006 =	27.9
Huawei XH621 v2	SPECint_base2006 =	26.4

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2014
Hardware Availability: Jan-2012
Software Availability: Nov-2013

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-wl, -z, muldefs -L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64
400.perlbench: icc -m32
445.gobmk: icc -m32
464.h264ref: icc -m32
C++ benchmarks (except as noted below):
icpc -m32
473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei XH621 v2

SPECint2006 = 27.9

SPECint_base2006 = 26.4

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2014

Hardware Availability: Jan-2012

Software Availability: Nov-2013

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias

458.sjeng: basepeak = yes

462.libquantum: -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
-auto-p32

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-w1, -z, muldefs -L/smartheap -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECint2006 =	27.9
Huawei XH621 v2	SPECint_base2006 =	26.4

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2014
Hardware Availability: Jan-2012
Software Availability: Nov-2013

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl, -z, muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:34:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 June 2014.