



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp®_rate2006 = 868

PRIMERGY CX2550 M1, Intel Xeon E5-2697 v3, 2.6 GHz

SPECfp_rate_base2006 = 844

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

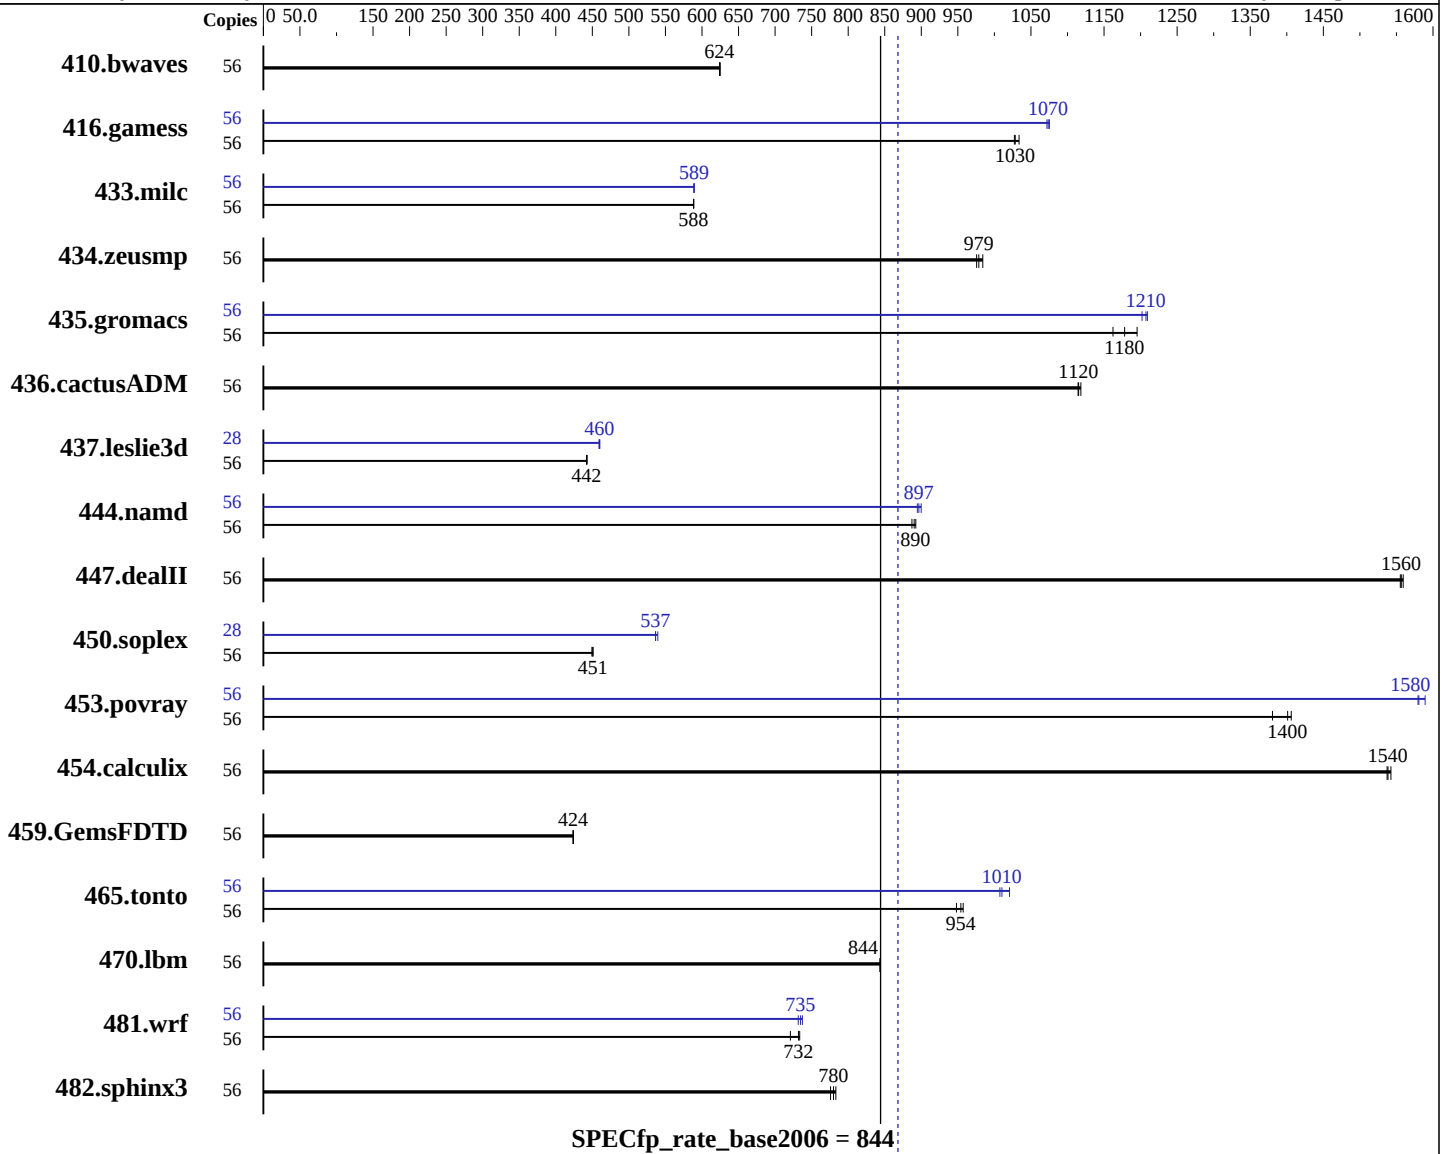

SPECfp_rate_base2006 = 844

SPECfp_rate2006 = 868

Hardware

CPU Name: Intel Xeon E5-2697 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz: 2600
FPU: Integrated
CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
Kernel 3.10.0-123.8.1.el7.x86_64
Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = **868**

PRIMERGY CX2550 M1, Intel Xeon E5-2697 v3, 2.6 GHz

SPECfp_rate_base2006 = **844**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

L3 Cache: 35 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	1218	625	1220	624	<u>1219</u>	<u>624</u>	56	1218	625	1220	624	<u>1219</u>	<u>624</u>		
416.gamess	56	1061	1030	1067	1030	<u>1066</u>	<u>1030</u>	56	<u>1021</u>	<u>1070</u>	1020	1080	1023	1070		
433.milc	56	874	588	<u>874</u>	<u>588</u>	873	589	56	<u>873</u>	<u>589</u>	873	589	872	589		
434.zeusmp	56	522	976	518	984	<u>521</u>	<u>979</u>	56	522	976	518	984	<u>521</u>	<u>979</u>		
435.gromacs	56	344	1160	335	1200	<u>339</u>	<u>1180</u>	56	333	1200	<u>331</u>	<u>1210</u>	331	1210		
436.cactusADM	56	600	1110	598	1120	<u>600</u>	<u>1120</u>	56	600	1110	598	1120	<u>600</u>	<u>1120</u>		
437.leslie3d	56	<u>1191</u>	<u>442</u>	1189	443	1191	442	28	572	460	573	459	<u>572</u>	<u>460</u>		
444.namd	56	503	892	<u>504</u>	<u>890</u>	506	887	56	499	900	502	895	<u>501</u>	<u>897</u>		
447.dealII	56	412	1560	411	1560	<u>412</u>	<u>1560</u>	56	412	1560	411	1560	<u>412</u>	<u>1560</u>		
450.soplex	56	<u>1037</u>	<u>451</u>	1036	451	1039	449	28	<u>435</u>	<u>537</u>	433	540	435	536		
453.povray	56	212	1410	216	1380	<u>213</u>	<u>1400</u>	56	189	1580	<u>188</u>	<u>1580</u>	187	1590		
454.calculix	56	<u>300</u>	<u>1540</u>	300	1540	301	1540	56	<u>300</u>	<u>1540</u>	300	1540	301	1540		
459.GemsFDTD	56	1402	424	1401	424	<u>1402</u>	<u>424</u>	56	1402	424	1401	424	<u>1402</u>	<u>424</u>		
465.tonto	56	581	948	576	957	<u>578</u>	<u>954</u>	56	547	1010	540	1020	<u>545</u>	<u>1010</u>		
470.lbm	56	<u>912</u>	<u>844</u>	912	844	912	844	56	<u>912</u>	<u>844</u>	912	844	912	844		
481.wrf	56	853	734	868	721	<u>855</u>	<u>732</u>	56	848	737	<u>851</u>	<u>735</u>	855	732		
482.sphinx3	56	1394	783	1407	776	<u>1399</u>	<u>780</u>	56	1394	783	1407	776	<u>1399</u>	<u>780</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Energy Performance = Performance
 Utilization Profile = Unbalanced

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 868

PRIMERGY CX2550 M1, Intel Xeon E5-2697 v3, 2.6 GHz

SPECfp_rate_base2006 = 844

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Platform Notes (Continued)

QPI snoop mode: Cluster on Die
COD Enable = Enabled, Early Snoop = Disabled
CPU C1E Support = Disabled

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
memory using RedHat EL 7.0

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

This result was measured on the PRIMERGY CX2550 M1. The PRIMERGY CX2550 M1
and the PRIMERGY CX2570 M1 are electronically equivalent.

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -noFOR_main

436.cactusADM: -DSPEC_CPU_LP64 -noFOR_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 3



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 868

PRIMERGY CX2550 M1, Intel Xeon E5-2697 v3, 2.6 GHz

SPECfp_rate_base2006 = 844

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Base Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -noFOR_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 868

PRIMERGY CX2550 M1, Intel Xeon E5-2697 v3, 2.6 GHz

SPECfp_rate_base2006 = 844

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 868

PRIMERGY CX2550 M1, Intel Xeon E5-2697 v3, 2.6 GHz

SPECfp_rate_base2006 = 844

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jan 14 10:27:30 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 January 2015.